


IN-DASH DIN STEREO INSTALLATION KIT FOR 2007-UP NISSAN SENTRA

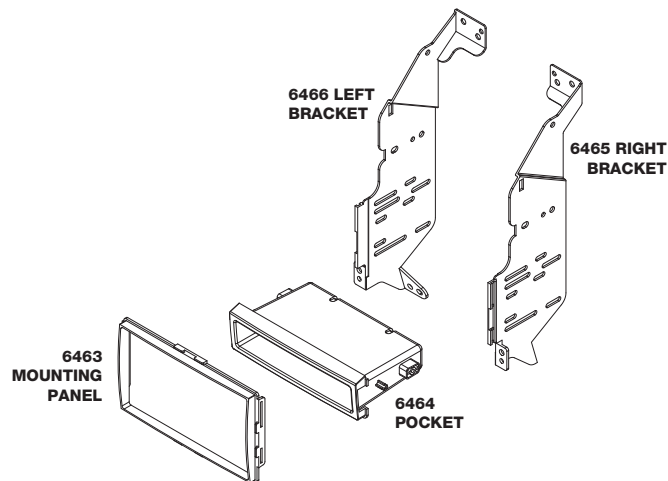

INTRODUCTION/PRELIMINARY

This premium installation kit is for 2007-UP Nissan Sentra vehicles. Included are all the parts you need to mount your car stereo or CD player into your vehicle's dash. Refer to the individual instruction in this manual to remove your vehicle's factory radio and assemble the kit.

CAUTION

DISCONNECT YOUR VEHICLE'S NEGATIVE BATTERY TERMINAL BEFORE THE INSTALLATION TO HELP PREVENT ELECTRICAL DAMAGE. WE RECOMMEND THE USE OF A VOLT/OHM METER OVER A TEST LIGHT TO CHECK WIRING. A TEST LIGHT OR GROUNDED WIRE PROBE CAN CAUSE DAMAGE TO THE VEHICLE'S COMPUTER AND/OR DIAGNOSTIC SYSTEMS. AVOID ALL FACTORY AIRBAG WIRING - AIRBAGS CAN ACCIDENTALLY DEPLOY CAUSING SERIOUS INJURY OR DEATH.

NOTES

- See your vehicle's instructions for any special tools your installation might require.
- Read all instructions accompanying your car stereo for proper wiring and mounting instructions.

FACTORY WIRING CODES


For Factory Wiring Codes go to: www.scosche-cars.com

CAR STEREO CONNECTORS

PROVIDE EASY CONNECTION OF YOUR CAR STEREO TO FACTORY WIRING HARNESS.

NN04B
2007-UP Nissan Sentra

NAA2B
2007-UP Nissan Sentra
Antenna Adapter

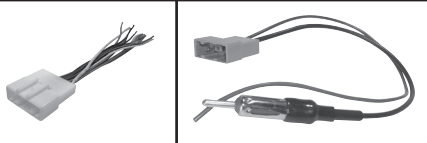

LIABILITY DISCLAIMER

This instruction booklet is based on carefully documented data and research of automobile dash disassembly, wire harness/ codes and information pertaining to installation of this kit (NN1641B) in 2007 Nissan Sentra vehicles. Scosche Industries, Inc. can not be held responsible for discrepancies/inconsistencies that may occur due to the automobile manufacturing changes or options, or damage that may occur in the automobile during the installation of components while using this booklet.

FACTORY STEREO REMOVAL

RADIO REMOVAL:


Note: The factory radio provision is for a DIN or Double DIN.

1. Remove shifter knob, slide down chrome trim, release snap ring in shifter knob, and pull knob off.
2. Remove shifter cover plate. The plate snaps off.
3. Using PRT remove A/C controls underneath the radio. Disconnect and remove.
4. Using PRT unsnap the panel above the radio assembly.
5. Remove the (4) Phillips screws holding the radio, radio display, and A/C display. Disconnect and remove.
6. Remove the (8) torx screws from radio. Slide radio out of brackets and remove.

MOUNTING THE STEREO


ATTACHING THE SINGLE DIN STEREO

1. Snap the 6465 and 6466 brackets to the 6463 kit panel.
2. Align the 6464 pocket to the lower edge of the panel. Secure the pocket to the mounting brackets with the two (2) supplied screws in the installation kit.
3. Mount radio to brackets with the radio's supplied screws.

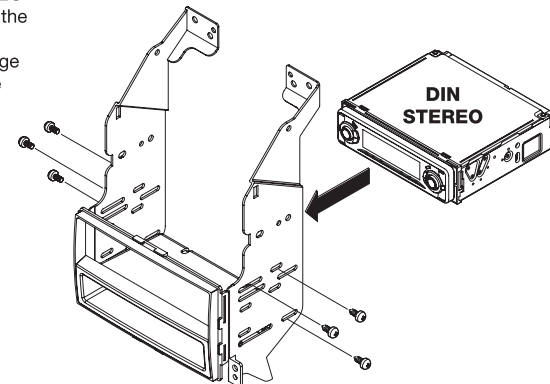

ATTACHING THE SINGLE DIN STEREO

1. Snap the 6465 and 6466 brackets to the 6463 kit panel.
2. Align, position and bolt the aftermarket double DIN-ISO head unit to the mounting brackets. Use the hardware supplied with the aftermarket double DIN-ISO head unit to secure the mounting brackets to the aftermarket radio.

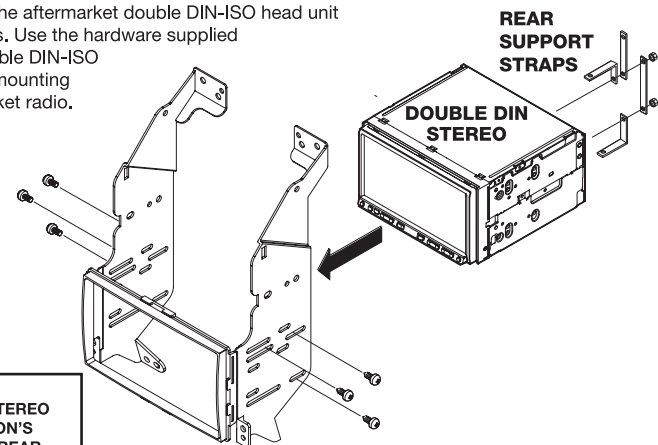

NOTE:
REAR SUPPORTING THE STEREO ADDS TO THE INSTALLATION'S STRUCTURAL INTEGRITY. REAR SUPPORT AVAILABLE SEPARATELY.



If you have any further questions, or need dash disassembly instructions, call our TOLL-FREE number:

TECHNICAL HELP line 1-800-621-3695 x3